



TIER4
SIMUL-PHASE®

MORE INFO



DGK25F 59 DB(A) INDUSTRIAL GENERATOR

POWER THAT NEVER QUILTS

POWERFUL FEATURES

Built to Endure. Powered to Perform.

- Fuel-efficient diesel engines, built-in overload protection, and a rugged, weather-resistant enclosure ensure lasting performance and reliability—no matter the conditions.

Power That Adapts.

- Simul-Phase® technology delivers both single and three-phase output simultaneously, with 120/240V single-phase available at every voltage setting for unmatched versatility on the job.
- Includes priority trip breakers equipped with separate breakers for single and three-phase loads, with user-selectable priority to protect preferred output during overloads.

ACCESSORIES

- Trailer
- Block heater
- Battery charger
- Cam-loks




ULTRA-QUIET DESIGN

- ECHO industrial generators deliver powerful performance with minimal sound.
- Air dams and insulated panels redirect cooling air, by doubling the length of travel, to minimize airflow noise without the need for power-robbing auxiliary fans.
- The enclosure is built with heavy-gauge door panels and specially engineered sound-absorbing foam, delivering reduced noise levels and enhanced structural rigidity.
- A specially-tuned muffler and a longer exhaust pipe reduce the impact of high and low noise frequencies.

SIMUL-PHASE® CAPABILITIES

Power 1-Phase and 3-Phase loads at the same time without the need of adding a transformer.

Simul-Phase® unique split buss:

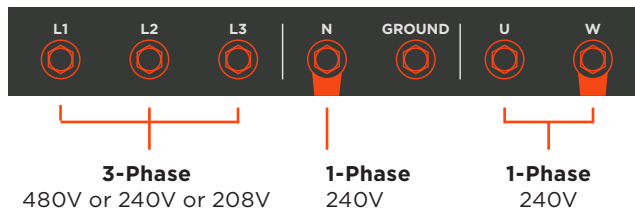

GENERATOR	
Generator Type	Revolving field brushless AC
Continuous output, 60Hz, 3-phase	20kW (25kVA)
Continuous output, 1-phase	15kW (15kVA) [7.5kW(7.5kVA)]
Standby output, 3-phase	22kW (27.5kVA)
Voltage, 3-phase (switchable)	240 [480V]
Voltage, 1-phase (switchable)	120, 139, 240 [277V]
Amps, 1 phase, 120V	62.5A x 2 [31.3A] (zig-zag-w)
Amps, 1-phase, 240V	62.5A [31.3A] (zig-zag-w)
Amps, 3-phase, 240V	60A
Amps, 3 phase, 480V	30A
Rated frequency-regulation	60Hz ±0.25%
Rated speed, 60Hz	1800 rpm
Sound level, no load at 23 feet	59 db
Sound level, full load at 23 feet	62 db
DIESEL ENGINE	
Make, model and type	Isuzu 4LE2T, 4 cylinder
Emission certification	US EPA tier 4 final
Design features	Direct injection, turbocharged
Displacement	133 cu. in. (2.179 L)
Continuous rated output	33 hp @ 1800 rpm
Starting system	Electric 12V DC
Internal fuel capacity, 110% full fluid containment	51.5 gallons (195L)
Fuel consumption, full load	1.6 gal./hr (6.1L/hr)
Fuel consumption, 3/4 load	1.2 gal./hr (4.64L/hr)
Fuel consumption, 1/2 load	0.9 gal./hr (3.6L/hr)
Fuel consumption, 1/4 load	0.7 gal./hr (2.5L/hr)
Total coolant capacity	2.6 gallons (10L)
Total oil capacity / oil class	3.0 gal. (11.5L)
PHYSICAL CHARACTERISTICS	
Dimensions (L x W x H)	63" x 33" x 55" (1603 x 850 x 1400mm)
Unit dry weight	1929 lbs (875kg)
Trailer unit dimensions (L x W x H)	116.54" x 60.0" x 65.74" (2960 x 1524 x 1670 mm)
Trailer unit dry weight	2879 lbs (1306kg)

POWER DISTRIBUTION

USE IS POSSIBLE UP TO THE KVA AS SHOWN BELOW

1-phase, 3 wire output terminal		1-phase 120 V receptacle				1-phase 240/120 V receptacle		Total
		CON1	CON2	CON3	CON4	CON5	CON6	
U-W	9	Total 2.4		Total 2.4		12	12	15/[7.5]
U-N	4.5							7.5/[3.75]
W-N	4.5							7.5/[3.75]

* Figures in brackets are used when set to 480 V.

