



Installation Instructions

DGK15FL Fire Extinguisher



000009110

Kit Contents:

- (1) 2.5 Lb. Co² Fire Extinguisher w\Mount
- (2) Each - 1/4-20x3/4 stainless steel bolts,
1/4-20 stainless steel flat washers and
1/4-20 stainless steel lock nuts.



Tools & Materials Required:

- Masking tape
- Scissors
- Safety knife
- Center point
- Deburring tool
- 1/8" drill bit
- 5/16" drill bit
- Drill (electric or cordless)
- 10mm socket - 3/8 drive
- 7/16 socket - 3/8 drive
- 3/8 ratchet or driver with 3" extension
- 7/16 combination wrench

- (1) DGK15FL Fire Extinguisher
Installation Template

INSTALLATION INSTRUCTIONS

- Step 1: Verify Kit Contents
- Step 2: Release latch on Control Cabinet to access Starter Switch. (Figure 1)



Figure 1

- Step 3: Move generator AUTO\STOP\START\ selector switch to the STOP position if not already in STOP position. (Figure 2)



Figure 2

- Step 4: Using a 13 mm socket and driver, proceed to remove all ten (10) bolts from the Rear Enclosure Frame Cover panel, then set the panel on a sturdy flat work surface. (Figure 3)

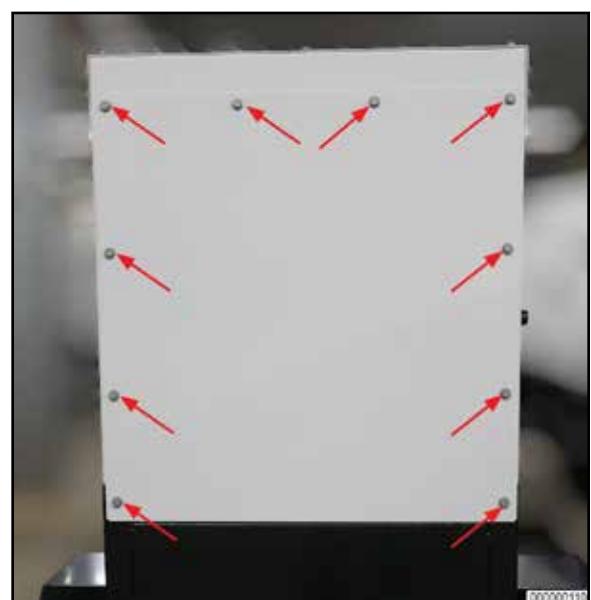


Figure 3

- Step 5: Remove fire extinguisher from packaging. Release latch securing extinguisher mount to extinguisher. Remove mount.
- Step 6: Prepare installation template for use; using scissors or safety knife, cut out the template following the dashed lines.
- Step 7: Align template on lower right corner of Enclosure Frame. Secure in place with masking tape. (Figure 4)
- Step 8: Use center punch to mark centers of holes indicated on template.
- Step 9: Using a 1/8" drill bit and drill, create pilot holes at previously marked center points on template.
- Step 10: Using a 13/64" drill bit, open pilot holes to final 13/16" size. Now remove and discard template.



Figure 4

- Step 11: Flip rear panel over. Using scissors or safety knife, remove approximately 1 inch square of foam insulation from around each mounting hole as shown. (Figure 5)
- Step 12: Using deburring tool, remove all sharp edges on backside and front of mounting holes.

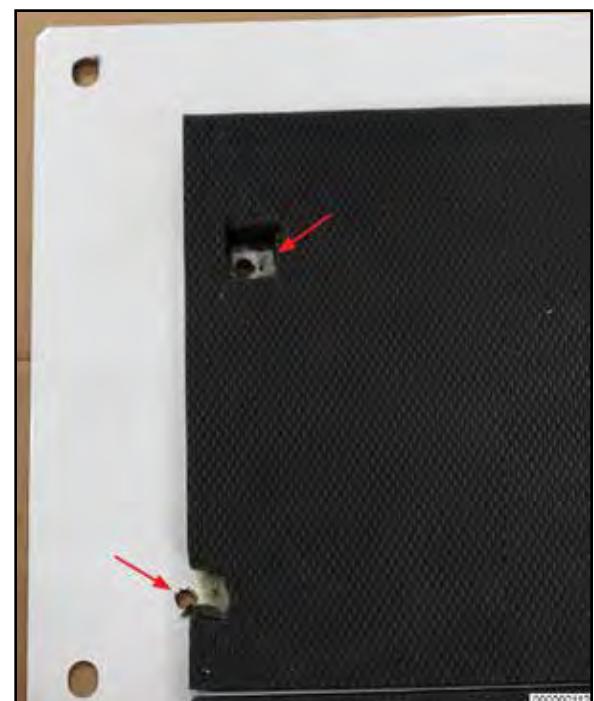


Figure 5

- Step 12: Flip panel over (foam side of rear panel facing down), position fire extinguisher mount over mounting holes and attach to rear panel using two (2) 1/4-20 stainless steel bolts on the mount, and two (2) 1/4-20 stainless steel flat washers & locknuts on the backside. (Figure 6) DO NOT overtighten - snug bolts & nuts only.
- Step 13: Reinstall rear panel using ten (10) previously removed bolts with 13mm socket and ratchet or driver. Snug bolts only

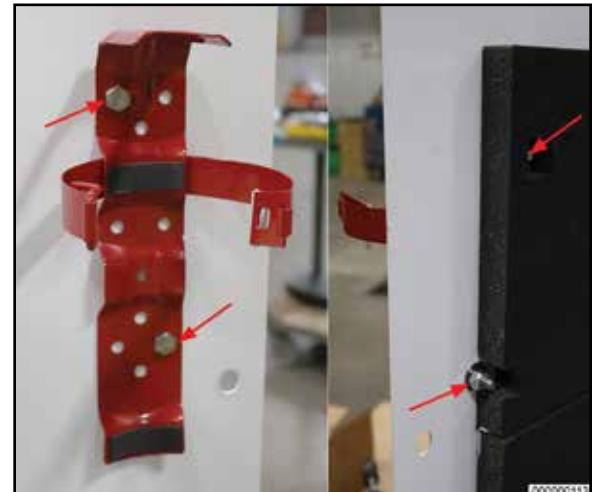


Figure 6

- Step 14: Place fire extinguisher into mountholder and secure with clasp. (Figure 7)
- Step 15: Close and latch Control Cabinet door.

The Fire Extinguisher Installation in now complete



Figure 7