




# TRIMMERS



Performance. What else needs to be said about the world's finest commercial-grade grass trimmers? ECHO's easy-to-use custom ergonomic controls, lightweight design, and powerful professional-grade, 2-stroke engine technologies give you the tools to enhance your productivity. Whether you need a lightweight curved shaft model for simple trimming around posts or fence lines or you require the long reach of a straight shaft model, ECHO string trimmers are designed for performance.

## SUGGESTED TRIMMER APPLICATION

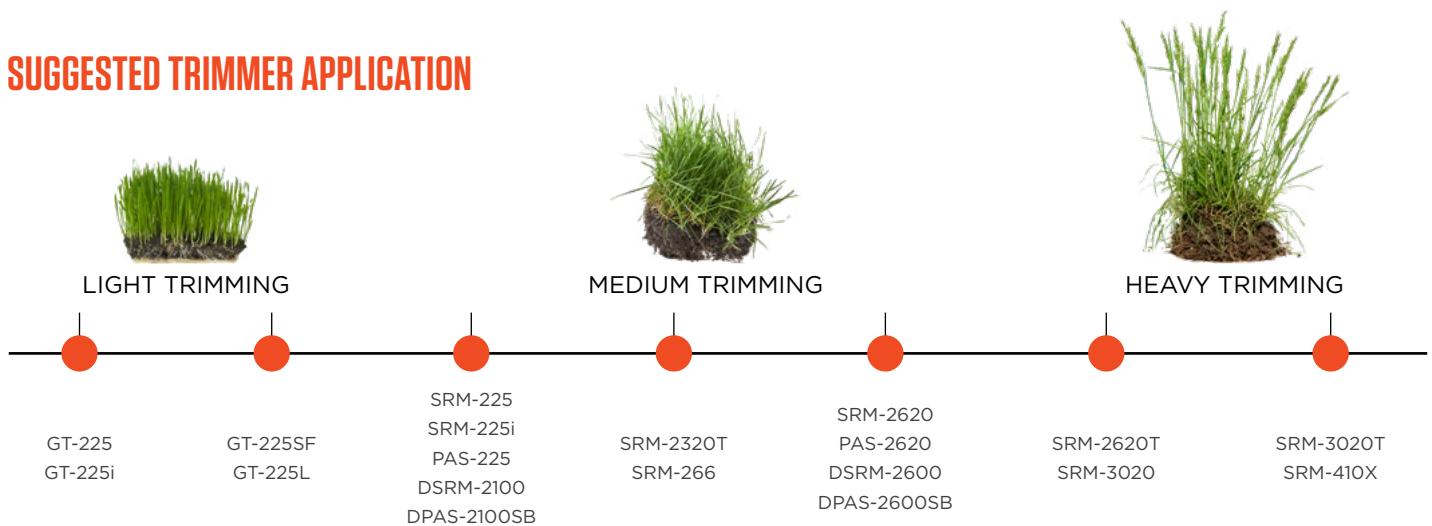

## GT-225

**Curved Shaft Trimmer**




Lightweight and easy to use. The popular GT-225 curved-shaft trimmer features an i-30™ ignition for starts with 30% less effort. A 2-line Rapid Loader® trimmer head increases productivity while decreasing workload.

- i-30™ starter reduces starting effort by 30%
- Ergonomic adjustable handle for a custom fit
- Curved shaft for easy maneuverability

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>10.1</b>
Shaft Length (in.) .....	<b>48</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Rapid Loader®</b>
Cutting Swath (in.) .....	<b>16</b>





# TRIMMERS

## GT-225i

Curved Shaft Trimmer



The GT-225i curved-shaft string trimmer features an i-75™ ignition system, delivering reliable, easy starts with 75% less effort. Its ergonomic, maneuverable design ensures precision control with powerful results.

- i-75™ starter reduces starting effort by 75%
- Ergonomic adjustable handle for a custom fit
- Curved shaft for easy maneuverability

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>10.6</b>
Shaft Length (in.) .....	<b>48</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Rapid Loader®</b>
Cutting Swath (in.) .....	<b>16</b>

## GT-225SF

Curved Shaft Trimmer



The GT-225SF curved-shaft string trimmer powers a Speed-Feed® 400 trimmer head for quick string reloads without disassembly. An i-30™ system also reduces starting effort by 30%, ensuring efficient productivity.

- Speed-Feed® 400 head reloads in seconds without disassembly
- i-30™ starter reduces starting effort by 30%
- Ergonomic adjustable handle for a custom fit

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>10.8</b>
Shaft Length (in.) .....	<b>48</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>16</b>

## GT-225L

Curved Shaft Trimmer



The GT-225L curved shaft trimmer features a 55-inch shaft to increase reach and decrease effort. With a Speed-Feed® 400 trimmer head and an i-30™ starting system, it maximizes productivity without adding more work to the workday.

- Extended shaft length provides longer reach for residential yard touch-ups
- i-30™ starter reduces starting effort by 30%
- Rubber over-molded throttle handle

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>11.2</b>
Shaft Length (in.) .....	<b>55</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>16</b>

## SRM-225

Straight Shaft Trimmer



The SRM-225 straight-shaft string trimmer has earned its reputation through countless long days and tough jobs. With a quick-loading Speed-Feed® 400 trimmer head and 59-inch shaft, it takes convenience and productivity to a new level.

- i-30™ starter reduces starting effort by 30%
- Ergonomic cushioned front and rear handles for user comfort
- Tool-less, easy-access, commercial-grade felt air filter for durability

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>11.5</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>17</b>

## SRM-225i

Straight Shaft Trimmer



The SRM-225i straight-shaft string trimmer features an i-75™ starting system to reduce effort by 75%. A Speed-Feed® 400 trimmer head reloads in seconds, minimizing downtime and increasing productivity.

- i-75™ starter reduces starting effort by 75%
- Ergonomic cushioned front and rear handles for user comfort
- Tool-less, easy-access, commercial-grade felt air filter for durability

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>12</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>17</b>

# SRM-2320T

**Straight Shaft Trimmer**



The high-torque SRM-2320T straight-shaft string trimmer increases productivity while decreasing fatigue. With a 2:1 gear ratio, it delivers 28% more torque than the SRM-225, making quick work of overgrown grasses.

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system dramatically increases cleaning capability and allows for longer maintenance intervals
- Chrome cylinder and piston plating increases engine life

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>12.2</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: ..... <b>Speed-Feed® 400</b>	
Cutting Swath (in.) .....	<b>17</b>

# SRM-266

**Straight Shaft Trimmer**



The SRM-266 straight-shaft string trimmer is built to power through tough jobs without slowing down. A Speed-Feed® 400 trimmer head reduces string replacement time, frequency and effort, while ergonomic features make light work of long days.

- i-30™ starter reduces starting effort by 30%
- Two-stage commercial-grade air filtration for long engine life
- Tool-less, easy-access, commercial-grade felt air filter for durability

Engine (cc) .....	<b>25.4</b>
Weight (lbs.) .....	<b>13.4</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>16.9</b>
Cutting Head: ..... <b>Speed-Feed® 400</b>	
Cutting Swath (in.) .....	<b>17</b>



# SRM-2620

**Straight Shaft Trimmer**



The SRM-2620 straight-shaft string trimmer cuts tough job sites down to size. With a Speed-Feed® 400 cutting head and easy starts in any condition, it's the most reliable member of any professional landscaping crew.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc) .....	<b>25.4</b>
Weight (lbs.) .....	<b>12.6</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>20.6</b>
Cutting Head: ..... <b>Speed-Feed® 400</b>	
Cutting Swath (in.) .....	<b>17</b>



# SRM-2620T

**Straight Shaft Trimmer**



The SRM-2620T straight-shaft string trimmer features a 2:1 gear ratio that delivers 21% higher torque than the competition, and comes with a Speed-Feed® 400 cutting head and an impressive power-to-weight ratio.

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc) .....	<b>25.4</b>
Weight (lbs.) .....	<b>12.8</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>20.6</b>
Cutting Head: ..... <b>Speed-Feed® 400</b>	
Cutting Swath (in.) .....	<b>17</b>





# SRM-3020

**Straight Shaft Trimmer**



Make workdays more efficient and productive with the class-leading SRM-3020 straight-shaft string trimmer. Featuring lightweight construction, a Speed-Feed® 500 cutting head and a 20 in. cutting swath, it quickly powers through one job and onto the next.


- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc) .....	<b>30.5</b>
Weight (lbs.) .....	<b>13.7</b>
Shaft Length (in.).....	<b>59</b>
Fuel Capacity (fl. oz.).....	<b>24</b>
Cutting Head: .....	<b>Speed-Feed® 500</b>
Cutting Swath (in.).....	<b>20</b>



# SRM-3020T

**Straight Shaft Trimmer**



The high-torque SRM-3020T straight-shaft string trimmer comes with a Speed-Feed® 500 cutting head, ergonomic design and easy, reliable starting inspires confidence and increases productivity.

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc) .....	<b>30.5</b>
Weight (lbs.) .....	<b>13.9</b>
Shaft Length (in.).....	<b>59</b>
Fuel Capacity (fl. oz.).....	<b>24</b>
Cutting Head: .....	<b>Speed-Feed® 500</b>
Cutting Swath (in.).....	<b>20</b>

# SRM-410X

**Straight Shaft Trimmer**



The most powerful model from the brand synonymous with professional-grade power. The ECHO SRM-410X straight-shaft string trimmer levels tough, overgrown weeds and grass with power to spare.

- Solid steel drive shaft for smooth acceleration and lightweight
- Pleated paper air filter for use in harsh conditions
- Equipped for use with a blade (blade sold separately)
- 2-in-1 shield

Engine (cc) .....	<b>42.7</b>
Weight (lbs.) .....	<b>18.4</b>
Shaft Length (in.).....	<b>60.2</b>
Fuel Capacity (fl. oz.).....	<b>32.1</b>
Cutting Head: .....	<b>Speed-Feed® 500</b>
Cutting Swath (in.).....	<b>20</b>



# TRIMMER ACCESSORIES

## Edger Attachment

Fits SRM-266, SRM-2620/T, and BRD-2620.

**Part #: 99944230001**



## RED ARMOR® OIL

2-stroke semi-synthetic engine oil formulated with powerful detergents and antioxidants to clean existing deposits, protect against future carbon build-up and promote longer engine life.

<b>Part #: 6550000</b>	<b>2.6 fl. oz. tray</b>	<b>48 loose</b>	<b>1 gallon mix</b>
<b>Part #: 6550001</b>	<b>2.6 fl. oz.</b>	<b>(8) 6 pks.</b>	<b>1 gallon mix</b>
<b>Part #: 6550002</b>	<b>5.2 fl. oz.</b>	<b>(8) 6 pks.</b>	<b>2 gallon mix</b>
<b>Part #: 6550025</b>	<b>6.4 fl. oz.</b>	<b>(8) 6 pks.</b>	<b>2.5 gallon mix</b>
<b>Part #: 6550005</b>	<b>12.8 fl. oz.</b>	<b>12 per case</b>	<b>5 gallon mix</b>
<b>Part #: 6550006</b>	<b>16 fl. oz.</b>	<b>12 per case</b>	<b>6 gallon mix</b>
<b>Part #: 6550050</b>	<b>1 gallon</b>	<b>4 per case</b>	<b>50 gallon mix</b>
<b>Part #: 6550250</b>	<b>5 gallons</b>	<b>1 pail</b>	<b>250 gallon mix</b>
<b>Part #: 6552750</b>	<b>55 gallons</b>	<b>1 drum</b>	<b>2,750 gallon mix</b>





# BRUSHCUTTERS



Power, comfort and stability is what you can expect from ECHO's brushcutters. Easy-to-use custom ergonomic controls, lightweight design, and powerful professional-grade, 2-stroke engine technologies give you the tools to enhance your productivity. Ergonomic U-handles provide improved control to tackle all clearing applications including rough grass, thickets, shrubs and dense undergrowth.

## SUGGESTED BRUSHCUTTER APPLICATION




LIGHT CLEARING



MEDIUM CLEARING



HEAVY CLEARING



## SRM-225U

**U-Handle  
Brushcutter**



8 in. 8-tooth brush blade included.




The SRM-225U brushcutter combines lightweight maneuverability and comfort with reliability. Ergonomic features like a quick-loading Speed-Feed® 400 trimmer head ensure the hard work is never harder than it should be.

- i-30™ starter reduces starting effort by 30%
- Ergonomic cushioned front and rear handles for user comfort
- Offset U-handle with stop switch and throttle lock out
- Includes shoulder harness and 8 in. 8-tooth brush blade

Engine (cc) .....	<b>21.2</b>
Weight (lbs.) .....	<b>13.6</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>12.8</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>17</b>



**ECHO**  
**SERIES**  
**SRM-2620U**  
**U-Handle Brushcutter**

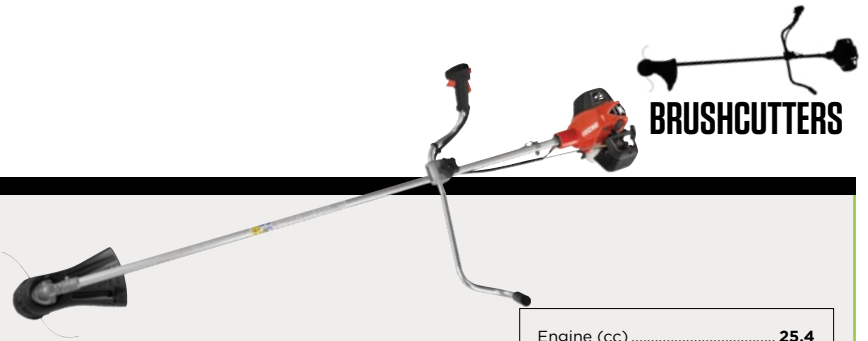

Featuring a quick-loading Speed-Feed® 400 trimmer head and a U-style handle with an integrated throttle lever, it minimizes fatigue and downtime.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Offset U-handle with stop switch and throttle lock out
- Equipped for blade use (blade sold separately)

Engine (cc) .....	<b>25.4</b>
Weight (lbs.) .....	<b>13.6</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>20.6</b>
Cutting Head: .....	<b>Speed-Feed® 400</b>
Cutting Swath (in.) .....	<b>17</b>

**ECHO**  
**SERIES**  
**SRM-3020U**  
**U-Handle Brushcutter**



When the job site calls for clearing heavy brush, the pros call for the SRM-3020U brushcutter. With an unmatched blend of torque and power, it elevates productivity to a new level. A Speed-Feed® 500 head and a U-style handle with integrated throttle helps cut a hard day's work down to size.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- U-style handle with integrated throttle lever and tool-less adjustment
- Equipped for blade use (blade sold separately)

Engine (cc) .....	<b>30.5</b>
Weight (lbs.) .....	<b>14.8</b>
Shaft Length (in.) .....	<b>59</b>
Fuel Capacity (fl. oz.) .....	<b>24</b>
Cutting Head: .....	<b>Speed-Feed® 500</b>
Cutting Swath (in.) .....	<b>20</b>

**SRM-410U**

**U-Handle  
Brushcutter**



The SRM-410U brushcutter powers through the toughest overgrown messes with complete confidence. Smart designs and user-friendly features harness its mighty power to ensure the only thing taking a punishment is the brush.

- 10 in., 80-tooth brush blade handles any sort of brush
- Large, 33.8 fl. oz. capacity fuel tank for long run times
- Metal shield

Engine (cc) .....	<b>42.7</b>
Weight (lbs.) .....	<b>19.1</b>
Shaft Length (in.) .....	<b>60.2</b>
Fuel Capacity (fl. oz.) .....	<b>32.1</b>
Cutting Head: .....	<b>10 in. Blade</b>
Cutting Swath (in.) .....	<b>10</b>

**ECHO**  
**BRUSHCUTTER ACCESSORIES**

**Blade  
Protectors**

**Part#: P021016360**  
**(8 in. diameter)**

**Part#: P021007470**  
**(10 in. diameter)**



**Offset U-Handle Kits**

See chart for part number.



Model	U-Handle Kit	Blade Conversion Kit (20 mm Arbor)	
		No Blade	Includes 8 in. - 8-Tooth Blade
SRM-225/i/2320T	99944200435	99944200418	99944200422
SRM-266	99944200675	99944200418	99944200422
SRM-2620/T*	-	99944200418	99944200422
SRM-3020/T*	-	99944200418	-

\* 2620 series requires an 8 in. 20 mm blade when using 99944200418  
\*\* 3020 series requires a 10 in. 20 mm blade when using 99944200418

**Blade Conversion Kit**

See chart for part number.





Our easy-to-use and innovative Speed-Feed® trimmer heads take the hassle out of refilling your trimmer head.

- No disassembly required
- Reload your trimmer line in 30 seconds or less
- Rugged head for medium and heavy-duty applications
- Smooth bottom enables the head to glide along the ground for an even cut

## EASY AS



- 1. LINE UP ARROWS**
- 2. FEED LINE**
- 3. TWIST BOTTOM DISC TO WIND**



Scan this QR code to see how to load trimmer line in your Speed-Feed® trimmer head.



### SPEED-FEED® 400 TRIMMER HEAD

**Part #: 99944200907** - Universal fit for ECHO curved shaft and straight shaft trimmers as well as select competitor models.

**Part #: 99944200907B** - Fits ECHO straight shaft trimmers, Bulk package of 24

**Part #: 99944200908** - Fits ECHO curved shaft trimmers.



**NEW**

### SPEED-FEED® 500 TRIMMER HEAD

**Part #: 99944200950** - Universal fit for ECHO curved shaft and straight shaft trimmers as well as select competitor models.

**Part #: 99944200950B** - Fits ECHO straight shaft trimmers, Bulk package of 24

Unique shape of this Speed-Feed® trimmer head is a trademark of ECHO Inc.

### ECHOmatic® Heads

Proven economical bump head design great for mowing and trimming.

ECHOmatic® (universal) Bulk package of 24	21560070 21560070B	
ECHOmatic® Pro Bulk package of 8	21560031 21560031B	

### Rapid Loader® Heads

For smaller jobs with minimal obstacles.  
Easy to reload with pre-cut strips.

2-Line (universal) Bulk package of 24	21560056 21560056B	
2-Line (universal)	21560062	
3-Line (50% more cutting ability)	99944200221	

### High-Capacity Manual Head

Traditional style head designed for rugged use with a large line holding capacity.

Universal Bulk package of 24	21560065 21560065B	
---------------------------------	-----------------------	--

### Heavy-Duty Fixed Line Heads

Durable aluminum head that is designed for tough cutting environments and areas that are abrasive.

Heavy-Duty	99944200220	
Heavy-Duty (High Torque)	99944200225	

### Maxi-Cut® Heads

For use where traditional trimmer line is not effective.

Maxi-Cut®	215311 Curved Shaft	
Pro Maxi-Cut®	215511 Straight Shaft	
Maxi-Cut® Blades Pack of 12	215712	



# TRIMMER LINE



BLACK DIAMOND®: TWISTED, SQUARE EDGES						
Line dia. (in.)	Large Clam		Medium Spool		Large Spool	
	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.095	253	330095071	885	330095073	1,394	330095075
.105	217	330105071	708	330105073	1,132	330105075



CROSS-FIRE®: MULTI-SIDED												
Line dia. (in.)	Mini Clam		Small Clam		Large Clam		Medium Spool		Large Spool		Extra Large Spool	
	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.065	40	102152652	305	306065051	-	-	-	-	-	-	-	-
.080	40	102152802	201	306080052	350	311080070	1,206	314080052	2,010	316080052	-	-
.095	40	102152952	141	306095053	250	311095070	846	314095053	1,410	316095053	-	-
.105	-	-	117	306105055	234	311105065	702	314105055	1,170	316105055	2,340	317105010
.130	-	-	-	-	150	311130064	450	314130054	750	316130054	1,500	317130010
.155	-	-	-	-	126	311155066	378	314155056	630	316155056	1,260	317155010

## PRE-CUT CROSS-FIRE® LINE FOR RAPID LOADER®

Line dia. (in.)	10 Count		50 Count	
	Length (in.)	Part #	Length (in.)	Part #
.080	-	-	-	-
.095	-	-	8	102222952
.105	-	-	8	102222105
.130	-	-	8	102222130
.155	8	102202155	8	102222155



ROUND LINE										
Line dia. (in.)	Mini Clam		Small Clam		Large Clam		Medium Spool		Large Spool	
	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.080	40	102142802	201	305080052	402	310080062	1,206	313080052	2,010	315080052
.095	-	-	141	305095053	282	310095063	846	313095053	1,410	315095053
.105	-	-	117	305105055	234	310105065	702	313105055	1,170	315105055
.130	-	-	-	-	-	-	450	313130054	750	315130054



SILENTWIST®: TWISTED, CURVED EDGES										
Line dia. (in.)	Mini Clam		Small Clam		Large Clam		Medium Spool		Large Spool	
	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.080	40	320080060	160	321080060	320	322080060	-	-	1,600	324080060
.095	40	320095060	115	321095060	230	322095060	685	323095060	1,140	324095060
.105	40	320105060	90	321105060	185	322105060	550	323105060	920	324105060

LIGHT GRASS/WEEDS  
SMALL RESIDENTIAL AREAS  
.065 in. - .080 in. LINE

MEDIUM GRASS/WEEDS  
LARGER RESIDENTIAL AREAS OR  
LIGHT COMMERCIAL AREAS  
.095 in. - .105 in. LINE

HEAVY GRASS/WEEDS  
INDUSTRIAL LANDSCAPING,  
COMMERCIAL LANDSCAPING  
.130 in. + LINE

# TRIMMER/BRUSHCUTTER HEADS

Model	ECHOmatic™	ECHOmatic™ Pro™	Heavy-Duty Fixed	Heavy-Duty Fixed (High Torque)	Speed-Feed™ 400	Speed-Feed™ 500	High-Capacity Manual	2-Line Rapid Loader®	3-Line Rapid Loader®	Maxi-Cut™	Pro Maxi-Cut™
Part #	21560070	21560031	99944200220	99944200225	99944200907 99944200908	99944200950	21560065	21560056 21560062	99944200221	215311	215511

## TRIMMERS

<b>Std. Line Diameter</b>	.095 in.	.095 in.	.130 in.	.130 in.	.095 in. (.080 in. GT)	.095 in.	.095 in.	.095 in.	.095 in.	-	-
<b>Std. Line Accepted</b>	20 ft.	25 ft.	16 in. Strips	16 in. Strips	20 ft. (30 ft. GT)	40 ft.	40 ft.	8 in. Strips	8 in. Strips	-	-
<b>Min. Line Diameter</b>	.080 in.	.080 in.	.130 in.	.130 in.	.080 in.	.080 in.	.080 in.	.080 in.	.095 in.	-	-
<b>Max. Line Diameter</b>	.105 in.	.130 in.	.130 in.	.130 in.	.105 in. (.095 in. GT)	.130 in.	.130 in.	.155 in. (.130 in.)	.155 in.	-	-
<b>Pre-Loaded Line</b>	Cross-Fire®	Cross-Fire®	Round	Round	Cross-Fire®	Black Diamond®	Cross-Fire®	Cross-Fire®	Cross-Fire®	Maxi-Cut® Blades	Maxi-Cut® Blades
<b>DSRM-2100 56V**</b>					■						
<b>DSRM-2600 56V**</b>					■						
<b>GT-225</b>					■			■		■	
<b>GT-225i</b>					■			■		■	
<b>GT-225SF</b>					■			■		■	
<b>GT-225L</b>					■			■		■	
<b>SRM-225</b>	■	■	■		■			■			■
<b>SRM-225i</b>	■	■	■		■			■			■
<b>SRM-2320T</b>	■	■		■	■			■	■		■
<b>SRM-266</b>	■	■	■		■	■	■	■	■		■
<b>SRM-2620</b>	■	■	■		■	■	■	■	■		■
<b>SRM-2620T</b>	■	■		■	■	■	■	■	■		■
<b>SRM-3020</b>	■	■	■		■	■	■	■	■		■
<b>SRM-3020T</b>	■	■		■	■	■	■	■	■		■
<b>SRM-410X</b>			■			■	■				

## BRUSHCUTTERS

<b>DSRM-2600U 56V**</b>					■						
<b>SRM-225U*</b>			■		■			■		■	
<b>SRM-2620U</b>	■	■	■		■	■	■	■	■		■
<b>SRM-3020U</b>	■	■	■		■	■	■	■	■		■

Standard ■      Optional ■

\*Also includes 8 in. 8-tooth brush blade

\*\*Comes pre-loaded with .095 in. Silentwist®



# BLADES AND CONVERSION KITS

A variety of brush and dense grass blades are available for all ECHO straight shaft (SRM series) trimmers and brushcutters. A blade conversion kit is required if not supplied with your original trimmer. Refer to your operator's manual for the appropriate safety harnesses, handles, shields, etc. when installing optional blades or accessories.

Model	10 in. 3-Tooth Grass and Weed Blade		8 in. 8-Tooth Grass and Weed Blade		8 in. 22-Tooth Brush Blade		8 in. 80-Tooth Brush Blade		10 in. 80-Tooth Brush Blade
	20 mm Arbor 99944200047	25 mm Arbor 99944200048	20 mm Arbor 69600120331	25 mm Arbor 69600121431	20 mm Arbor 99944200131	25 mm Arbor 99944200141	20 mm Arbor 69500120331	25 mm Arbor 69500121432	25 mm Arbor 69500121431

## TRIMMERS: (\*U-HANDLE KIT OR BARRIER BAR IS REQUIRED FOR ALL METAL BLADES)

SRM-225/i	■	-	■	-	■	-	■	-	-
SRM-2320T	■	-	■	-	■	-	■	-	-
SRM-2620/T*	■	-	■	-	■	-	■	-	-
SRM-266	■	-	■	-	■	-	■	-	-
SRM-3020/T*	■	-	-	-	-	-	-	-	-
SRM-410X	-	■	-	-	-	-	-	-	■
DSRM-2600*	■	-	■	-	■	-	■	-	-

## FOR BRUSHCUTTERS:

SRM-225U	■	-	■	-	■	-	■	-	-
SRM-2620U	-	■	-	■	-	■	-	■	■
SRM-3020U	-	■	-	-	-	-	-	-	■
SRM-410U	-	■	-	-	-	-	-	-	■
DSRM-2600U	-	■	-	■	-	■	-	■	■

Standard ■ Optional ■

\*Please note if using a blade conversion kit, you MUST use a 20 mm blade. All blade conversion kits have 20 mm arbors. 8 in. blades are not to be used with a SRM-3020/T/U and SRM-410X/U. Blade conversion kit is required for metal blades.

## APPLICATION GUIDE:

Small Weeds	✓		✓						
Large Weeds	✓		✓		✓		✓		✓
Reeds, Bushes, Heavy Grass	✓		✓		✓		✓		✓
Bushes, Small Trees					✓		✓		✓

# TRIMMERS

	GT-225	GT-225i	GT-225SF	GT-225L	SRM-225	SRM-225i	SRM-2320T	SRM-266	SRM-2620	SRM-2620T	SRM-3020	SRM-3020T	SRM-410X
<b>Features and Benefits</b>													
Tool-less air filter cover for easy access	•	•	•	•	•	•	•	•	•	•	•	•	
Commercial-grade felt air filtration for long engine life	•	•	•	•	•	•							
Single-stage pleated air filtration for long engine life													•
2-stage pleated air filtration for long engine life									•	•	•	•	
2-stage commercial-grade air filtration for long engine life							•	•					
i-30™ starting system for 30% starting effort reduction	•		•	•	•		•	•					
i-75™ starting system for 75% starting effort reduction		•				•							
Digital ignition system for easy starting	•	•	•	•	•	•	•	•	•	•	•	•	•
Purge bulb for easy starting	•	•	•	•	•	•	•	•	•	•	•	•	•
Ergonomic throttle handle with rubber grip for comfort				•	•	•	•	•	•	•	•	•	
Ergonomic, adjustable front handle for a custom fit	•	•	•	•	•	•	•	•	•	•	•	•	•
Debris shield with integrated cut-off knife for optimal line length	•	•	•	•	•	•	•	•	•	•	•	•	
2-in-1 shield with integrated cut-off knife													•
Engine vibration-reduction system for operator comfort				•	•	•							
Extra heavy-duty vibration-reduction system for operator comfort							•	•	•	•	•	•	•
Speed-Feed® 400 cutting head for easy reloading			•	•	•	•	•	•	•	•			
High-capacity Speed-Feed® 500 cutting head for more line											•	•	•
Power head components made from magnesium											•	•	
Dual piston ring design for long engine life									•	•	•	•	
2:1 Pro Torque™ gear case ratio for superior power/cutting							•			•		•	
Harness, barrier bar, & blade-mount hardware included													•

# SPECIFICATIONS

Model	Engine Disp. (cc)	Carburetor (w/Purge Pump)	Fuel Capacity (fl. oz.)	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Shield & Cutting Swath (in.)	Drive Shaft	Gear Ratio	Nylon Line (in. dia.)	Dry Weight (lbs.)*	Dry Weight (lbs.)**
GT-225	21.2	Rotary	12.8	48	Curved	i-30™	Rapid Loader®	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire®	10.1	9.5
GT-225i	21.2	Rotary	12.8	48	Curved	i-75™	Rapid Loader®	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire®	10.6	10.0
GT-225SF	21.2	Rotary	12.8	48	Curved	i-30™	Speed-Feed® 400	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire®	10.8	9.5
GT-225L	21.2	Rotary	12.8	55	Curved	i-30™	Speed-Feed® 400	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire®	11.2	10.2
SRM-225	21.2	Rotary	12.8	59	Straight	i-30™	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Cross-Fire®	11.5	11.2
SRM-225i	21.2	Rotary	12.8	59	Straight	i-75™	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Cross-Fire®	12	11.7
SRM-2320T	21.2	Rotary	12.8	59	Straight	Standard	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	2:1	.095 Black Diamond™	12.2	11.6
SRM-266	25.4	Rotary	16.9	59	Straight	i-30™	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	1.4:1	.095 Black Diamond™	13.4	12.3
SRM-2620	25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Black Diamond™	12.6	11.7
SRM-2620T	25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed® 400	SRM with 17 in. Swath	4-Layer Cable	2:1	.095 Black Diamond™	12.8	11.9
SRM-3020	30.5	Rotary	24	59	Straight	Standard	Speed-Feed® 500	SRM with 20 in. Swath	4-Layer Cable	1.62:1	.095 Black Diamond™	13.7	12.1
SRM-3020T	30.5	Rotary	24	59	Straight	Standard	Speed-Feed® 500	SRM with 20 in. Swath	4-Layer Cable	2:1	.095 Black Diamond™	13.9	12.3
SRM-410X	42.7	Rotary	32.1	60.2	Straight	Standard	Speed-Feed® 500	SRM with 20 in. Swath	Steel	1.33:1	.095 Black Diamond™	18.4	16.3

\*with cutting head and shield \*\*without cutting head or shield

WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov



# BRUSHCUTTERS

	SRM-225U	SRM-2620U	SRM-3020U	SRM-410U
<b>Features and Benefits</b>				
Tool-less air filter cover for easy access	•	•	•	
Commercial-grade felt air filtration for long engine life	•			
Pleated air filtration for long engine life				•
2-stage pleated air filtration for long engine life		•	•	
i-30™ starting system for 30% starting effort reduction	•			
Digital ignition system for easy starting	•	•	•	•
Purge bulb for easy starting	•	•	•	•
Ergonomic U-handle with rubber grip for comfort and handling	•	•	•	•
Debris shield with integrated cut-off knife for optimal line length	•	•	•	
Engine vibration-reduction system for operator comfort	•			
Extra heavy-duty vibration-reduction system for operator comfort		•	•	•
Shoulder harness included for comfort and convenience	•	•	•	•
Additional shield and hardware included for blade use	•	•	•	
Speed-Feed® 400 cutting head for easy reloading	•	•		
High-capacity Speed-Feed® 500 cutting head for more line and larger line diameters			•	
Power head components made from high-grade magnesium for lightweight and durability		•	•	
Dual piston ring design for long engine life		•	•	
Tool-less U handle adjustment knob for ease of storage		•	•	•

# SPECIFICATIONS

Model	Engine Disp. (cc)	Carburetor (w/Purge Pump)	Fuel Capacity (fl. oz.)	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Shield & Cutting Swath (in.)	Drive Shaft	Arbor Size (mm)	Nylon Line (in. dia.)	Dry Weight (lbs.)*	Dry Weight (lbs.)**
SRM-225U	21.2	Rotary	12.8	59	Straight	i-30™	Speed-Feed® 400	SRM 17 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Cross-Fire®	13.6	12.7
SRM-2620U	25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed® 400	SRM 17 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Black Diamond®	13.6	12.4
SRM-3020U	30.5	Rotary	24	59	Straight	Standard	Speed-Feed® 500	SRM 20 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Black Diamond®	14.8	13.2
SRM-410U	42.7	Rotary	32.1	60.2	Straight	Standard	10 in. Brush Blade	Metal Blade Shield	Steel	25	-	19.1	18.3

\*with cutting head and shield \*\*without cutting head or shield