



CHAINSaws



Backed by professionals, ECHO's top and rear handle chainsaws can tackle the toughest jobs out there and will give you superior, smooth operation. Get the power and durability you need from the high-performance, 2-stroke engine and the fast start you want with our advanced ignition system. All ECHO chainsaws come standard with the best pro features such as vibration reduction systems, automatic oilers, inertia chain brakes and more.

SUGGESTED ARBORIST SAW APPLICATION

Arborist saw models for use by professionals only.



SMALL LIMBING

CS-2511T
DCS-2500T
CS-2511P
CS-271T



MEDIUM LIMBING & SECTIONING

CS-2511T
DCS-2500T
CS-2511P
CS-271T
CS-303T
CS-355T



LARGE LIMBING & SECTIONING

CS-355T
CS-361P



CS-2511T

Top Handle Chainsaw



The top-handle CS-2511T is in a class of its own as the lightest gas-powered chainsaw in North America.

- Choke with automatic fast idle for easy starting
- Fine grid starter cover prevents debris ingestion for longer life and less maintenance
- Clutch-driven adjustable oiler

Engine (cc)	25
Weight (lbs.)	5.2
Bar Length (in.)	12, 14
Fuel Capacity (fl. oz.)	6.4
Oil Capacity (fl. oz.)	4.7





CS-2511P

Rear Handle Chainsaw



The lightest rear handle chainsaw in the world features industry best power-to-weight ratio, helping to ensure a long day of work isn't more exhausting than it needs to be.

- Spring-assist starter
- Fine grid starter cover prevents debris ingestion for longer life and less maintenance
- Two-piece mesh air filter for easy cleaning

Engine (cc)	25
Weight (lbs.)	5.7
Bar Length (in.).....	12, 14
Fuel Capacity (fl. oz.)	6.4
Oil Capacity (fl. oz.)	4.7

CS-271T

Top Handle Chainsaw



The CS-271T surprises with incredible torque and instant throttle response, helping make light work of long days spent pruning and trimming branches.

- i-30™ starter reduces starting effort by 30%
- G-Force Engine Air Pre-Cleaner™ for reduced air filter maintenance
- Side-access chain tensioner for easy chain adjustments
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	26.9
Weight (lbs.)	6.6
Bar Length (in.).....	12
Fuel Capacity (fl. oz.)	8.1
Oil Capacity (fl. oz.)	5.4

CS-303T

Top Handle Chainsaw



Whether on the ground or in the tree, the top-handle CS-303T was made to meet the demanding needs of professional arborists. It starts easily and reliably, while smart design features ensure smooth, productive workdays.

- Proven design and an increase in power over the CS-271T
- Heavy-duty air filter provides superior air filtration
- Purge bulb provides fresh fuel to carburetor for fast starts
- Automatic adjustable oiler to match cutting conditions

Engine (cc)	30.1
Weight (lbs.)	7.7
Bar Length (in.).....	12, 14
Fuel Capacity (fl. oz.)	8.5
Oil Capacity (fl. oz.)	5.1

CS-355T

Top Handle Chainsaw



The CS-355T is ECHO's most powerful top handle chainsaw combining professional-grade power with ergonomic, user-friendly features. It delivers all-day productivity without all-day exhaustion.

- ECHO's highest-power top-handle chainsaw
- Heavy-duty air filter provides superior air filtration
- Integrated choke and fast idle with trigger release for fast starts
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	35.8
Weight (lbs.)	8
Bar Length (in.).....	14, 16
Fuel Capacity (fl. oz.)	11.2
Oil Capacity (fl. oz.)	8.2

CS-361P

Rear Handle Chainsaw




Top handle performance in a rear handle design, the CS-361P features excellent power-to-weight ratio and is loaded with user-friendly innovations. It's the easy choice for arborists facing oversized workdays.

- Compact rear-handle chainsaw for professional arborists
- Tool-less, easy-access air filter
- Integrated choke and fast idle with trigger release for fast starts
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	35.8
Weight (lbs.)	8.4
Bar Length (in.).....	14, 16
Fuel Capacity (fl. oz.)	10.8
Oil Capacity (fl. oz.)	7.8

SUGGESTED REAR HANDLE CHAINSAW APPLICATION

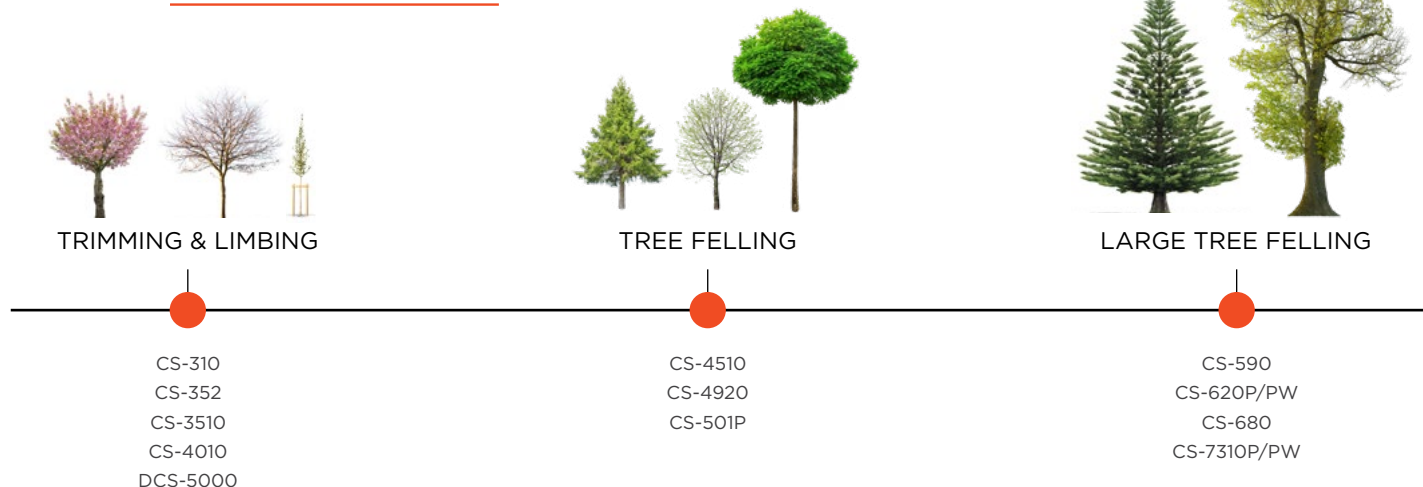

CS-310

Rear Handle Chainsaw



Professional power for a homeowner's light pruning or limbing applications. Available with a 14 in. or 16 in. bar, the 30.5 cc CS-310 is loaded with user-friendly features to maximize productivity and minimize user fatigue.

- i-30™ starter reduces starting effort by 30%
- Tool-less, easy-access air filter
- Vibration reduction system for increased comfort
- Side-access chain tensioner for easy chain adjustments

Engine (cc)	30.5
Weight (lbs.)	8.8
Bar Length (in.).....	14, 16
Fuel Capacity (fl. oz.)	8.5
Oil Capacity (fl. oz.)	8.8

CS-3510

Rear Handle Chainsaw



The lightest chainsaw in its class, ideal for storm clean up and mid size tree felling, it powers through with reliability and productivity.

- i-30™ starter reduces starting effort by 30%
- Multiple-stage air filtration system cleans air and reduces air filter maintenance
- Momentary stop switch automatically returns to "ON" position
- Translucent fuel tank for quick fuel level checks

Engine (cc)	34.4
Weight (lbs.)	8.2
Bar Length (in.).....	16
Fuel Capacity (fl. oz.)	9.5
Oil Capacity (fl. oz.)	7.8

CS-352

Rear Handle Chainsaw



A more powerful version of the ECHO CS-310 with a host of user-friendly features, it enhances productivity at any house, ranch or job site.

- i-30™ starter reduces starting effort by 30%
- Tool-less, easy-access air filter
- Side-access chain tensioner for quick chain adjustments
- Vibration-reduction system for operator comfort

Engine (cc)	34
Weight (lbs.)	8.8
Bar Length (in.).....	16
Fuel Capacity (fl. oz.)	8.5
Oil Capacity (fl. oz.)	8.8

NEW CS-4010

Rear Handle Chainsaw



Homeowners can step up in engine displacement to the CS-4010 for greater productivity in firewood processing and storm clean up.

- Purge bulb and momentary stop switch for easy starting
- Side-access chain tensioner for quick chain adjustments
- Translucent fuel and oil tanks for quick level checks

Engine (cc)	41.6
Weight (lbs.)	9.4
Bar Length (in.).....	18
Fuel Capacity (fl. oz.)	11.8
Oil Capacity (fl. oz.)	7.8

CS-4510

Rear Handle Chainsaw



Whether the work calls for mid-duty cleanup or bucking loads of firewood, the CS-4510 delivers power and performance for the long haul.

- Spring-assist starter reduces starting effort
- Heavy-duty air filter with tool-less access provides superior air filtration
- Momentary stop switch automatically returns to "ON" position

Engine (cc)	45
Weight (lbs.)	11.1
Bar Length (in.).....	16, 18
Fuel Capacity (fl. oz.)	16.2
Oil Capacity (fl. oz.)	11.1

NEW CS-4920

Rear Handle Chainsaw




A lightweight and powerful chainsaw for heavier jobs, such as installing fence posts, storm clean-up and firewood cutting.

- Purge bulb and stop switch automatically returns to "ON" position
- Tool-less air filter cover for easy access
- Side-access chain tensioner for quick chain adjustments

Engine (cc)	50.2
Weight (lbs.)	11.1
Bar Length (in.).....	16, 18, 20
Fuel Capacity (fl. oz.)	16.2
Oil Capacity (fl. oz.)	11.2

X CS-501P

Rear Handle Chainsaw



Made with pros in mind, the CS-501P is the lightest 50 cc chainsaw in North America, built for heavy use, logging and larger clearing without added effort.

- Aluminum handle with rubber grip
- Lightest chainsaw in its class
- Decompression valve for easier starting
- Two-piece flocked air filter for easy cleaning
- Captive bar nuts eliminate chance of losing fasteners

Engine (cc)	50.2
Weight (lbs.)	10.6
Bar Length (in.).....	18, 20
Fuel Capacity (fl. oz.)	16.6
Oil Capacity (fl. oz.)	9.5

CS-590



Rear Handle Chainsaw



The icon. A professionally productive beast for farm, ranch and tree felling. A lightweight, professional-grade 59.8 cc engine provides the confidence and performance needed to tame the toughest jobs.

- G-Force Engine Air Pre-Cleaner™ for reduced air filter maintenance
- Heavy-duty air filter with tool-less access provides superior air filtration
- Decompression valve for easier starting
- Two-piece flocked air filter for easy cleaning

Engine (cc)	59.8
Weight (lbs.)	13.2
Bar Length (in.).....	18, 20, 24
Fuel Capacity (fl. oz.)	21.8
Oil Capacity (fl. oz.)	10.2

X CS-620P

Rear Handle Chainsaw



Power for professionals. A best-in-class saw for heavy clearing and logging. Features a Performance Cutting System™ and loaded with user-friendly innovations to keep the sawdust flying.

- Professional-grade magnesium sprocket cover and crankcase
- G-Force Engine Pre-Cleaner™ and heavy-duty air filter provide superior air filtration
- Decompression valve for easier starting
- Heavy-duty, easy-access air filter for convenient in-field servicing

Engine (cc)	59.8
Weight (lbs.)	13.7
Bar Length (in.).....	18, 20, 24, 27
Fuel Capacity (fl. oz.)	21.8
Oil Capacity (fl. oz.)	10.2



CS-620PW

Rear Handle Chainsaw



Full-wrap handle

The pros know what separates ECHO power from everyone else. ECHO built the wrap-handle CS-620PW especially for those with the longest days and the most demanding standards.

- Professional-grade magnesium sprocket cover and crankcase
- G-Force Engine Pre-Cleaner™ and heavy-duty air filter provide superior air filtration
- Decompression valve for easier starting
- Heavy-duty full-wrap aluminum handle with rubber grip for more gripping options and reduced vibration

Engine (cc)	59.8
Weight (lbs.)	14.1
Bar Length (in.).....	20, 24, 27
Fuel Capacity (fl. oz.)	21.8
Oil Capacity (fl. oz.)	10.2

CS-680

Rear Handle Chainsaw



When a paycheck depends on performance, the pros reach for the CS-680. With 66.8 cc's of professional-grade ECHO power and available 20, 24 and 27 in. Performance Cutting System™ bar upgrades, it cuts the toughest jobs down to size.

- Performance Cutting System™
- Aluminum handle with rubber grip
- Top-mounted, tool-less access air filter cover for quick maintenance
- Side-access chain tensioner for easy chain adjustment

Engine (cc)	66.8
Weight (lbs.)	14.6
Bar Length (in.).....	20, 24, 27
Fuel Capacity (fl. oz.)	21.6
Oil Capacity (fl. oz.)	12.5



CS-7310P

Rear Handle Chainsaw



The CS-7310P Chainsaw is not only ECHO's most powerful chainsaw in North America but also has the features arborists and loggers need to tackle tough jobs. Whether you're tree felling or firewood harvesting, the CS-7310P is powerful, durable, and ready to work as long as you do.

- Professional-grade magnesium sprocket cover and crankcase
- Four-stage air filtration system cleans air and reduces air filter maintenance
- Translucent fuel tank for quick fuel level checks
- Available with .050 in. gauge or .058 in. gauge chain

Engine (cc)	73.5
Weight (lbs.)	14.8
Bar Length (in.).....	20, 24, 28, 32
Fuel Capacity (fl. oz.)	27.1
Oil Capacity (fl. oz.)	12.2



CS-7310PW

Rear Handle Chainsaw



Full-wrap handle

Power and maneuverability. The wrap-handle CS-7310PW is the most powerful ECHO chainsaw in North America. It owns a hard-earned reputation among professionals for all-day performance and all-world power.

- Professional-grade magnesium sprocket cover and crankcase
- Four-stage air filtration system cleans air and reduces air filter maintenance
- Full-wrap aluminum handle with rubber grip
- Available with .050 in. gauge or .058 in. gauge chain

Engine (cc)	73.5
Weight (lbs.)	15.4
Bar Length (in.).....	20, 24, 28, 32
Fuel Capacity (fl. oz.)	27.1
Oil Capacity (fl. oz.)	12.2



ARBORIST CHAINSAWS

	CS-2511T	CS-2511P	CS-271T	CS-303T	CS-355T	CS-361P
Features and Benefits						
Dual-post chain brake for extra durability	•	•			•	
Inertia-type chain brake for safety	•	•	•	•	•	•
Tool-less air filter cover for easy access			•			•
Tall profile bar with multi-rivet nose for longer life					•	•
Premium chain with extended-length cutters for greater life	•	•			•	•
Vibration-reduction system for operator comfort	•	•	•	•	•	•
i-30™ starting system for 30% starting effort reduction			•			
Spring-assisted starting system for reduced effort starting	•	•			•	•
Digital ignition system for easy starting and smooth acceleration	•	•	•		•	•
Integrated choke and fast idle with trigger release for easy starting	•	•	•		•	•
G-Force Engine Air Pre-Cleaner™ for cleaner air supply to engine	•	•	•		•	•
Automatic, adjustable oiler to match cutting conditions				•		
Automatic, adjustable clutch-driven oiler for reduced oil consumption	•	•	•		•	•
Replaceable, metal bumper spike for improved control		•			•	•
Side access chain tensioner for quick chain adjustments	•	•	•	•	•	•
Metal lanyard ring for easy attaching and detaching to harness	•			•	•	
Optional metal bumper spike for more control	•	•	•			
Purge bulb for easy starting	•	•	•	•	•	•

SPECIFICATIONS

Model	Engine Disp. (cc)	Starting System	Purge Bulb	Oiling System	Vibration Reduction	Available Bar Length (in)	Fuel Cap. (fl. oz.)	Oil Cap. (fl. oz.)	Dry Weight* (lbs.)
CS-2511T	25.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	12, 14	6.4	4.7	5.2
CS-2511P	25.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	12, 14	6.4	4.7	5.7
CS-271T	26.9	i-30™	Yes	Auto/Adjustable**	Yes	12	8.1	5.4	6.6
CS-303T	30.1	Standard	Yes	Auto/Adjustable	Yes	12 (14 U.S. only)	8.5	5.1	7.7
CS-355T	35.8	Spring-Assist	Yes	Auto/Adjustable**	Yes	14, 16	11.2	8.2	8.0
CS-361P	35.8	Spring-Assist	Yes	Auto/Adjustable**	Yes	14, 16	10.8	7.8	8.4

*without bar and chain **clutch-driven

REAR HANDLE CHAINSAWS

	CS-310	CS-3510	CS-352	CS-4010	CS-4510	CS-4920	CS-501P	CS-590	CS-620P	CS-620PW	CS-680	CS-7310P	CS-7310PW
Features and Benefits													
Dual-post chain brake for extra durability	•	•	•	•	•	•	•	•	•	•		•	•
Inertia-type chain brake for safety	•	•	•	•	•	•	•	•	•	•	•	•	•
Tool-less air filter cover for easy access	•		•		•	•	•	•	•	•	•		
Automotive-style air filter for superior filtration											•	•	•
Two-piece air filter for easy cleaning	•	•	•			•	•	•	•	•			
Multiple stage air filtration system		•			•							•	•
Felt air filter				•									
Round felt air filter					•	•							
G-Force Engine Air Pre-Cleaner™ for cleaner air supply	•		•				•	•	•	•			
Vibration-reduction system for operator comfort	•	•	•	•	•	•	•	•	•	•	•	•	•
i-30™ starting system for 30% starting effort reduction	•	•	•	•									
Spring-assisted starting system for reduced effort starting					•	•							
Digital ignition system for easy starting and smooth acceleration	•	•	•	•	•	•	•	•	•	•		•	•
Integrated choke and fast idle with trigger release	•	•	•	•	•	•	•	•	•	•		•	•
Automatic clutch-driven oiler for reduced oil usage	•	•	•	•									
Automatic, adjustable oiler to match cutting conditions				•									
Automatic, adjustable clutch-driven oiler for reduced oil usage					•	•	•	•	•	•		•	•
Automatic, adjustable oiler with manual override											•		
Performance Cutting System™ - upgraded bar and chain							•		•	•	•	•	•
Replaceable, metal bumper spike for improved control				•	•	•	•	•	•	•	•	•	•
Side access chain tensioner for quick chain adjustment	•	•	•	•	•	•	•	•	•	•	•	•	•
Decompression valve for easy starting							•	•	•	•		•	•
Aluminum handle with rubber grip for improved comfort							•		•	•	•	•	•
Purge bulb for easy starting	•	•	•	•	•	•							
Wrap handle for more gripping options										•			•
Translucent fuel tank for easy level checks		•		•	•	•	•	•	•	•		•	•

SPECIFICATIONS

Model	Engine Disp. (cc)	Starting System	Purge Bulb	Oiling System	Vibration Reduction	Available Bar Length (in)	Fuel Cap. (fl. oz.)	Oil Cap. (fl. oz.)	Dry Weight* (lbs.)
CS-310	30.5	i-30™	Yes	Automatic**	Yes	14, 16	8.5	8.8	8.8
CS-3510	34.4	i-30™	Yes	Automatic**	Yes	16	9.5	7.8	8.2
CS-352	34.0	i-30™	Yes	Automatic**	Yes	16	8.5	8.8	8.8
CS-4010	41.6	i-30™	Yes	Automatic**	Yes	18	11.8	7.8	9.4
CS-4510	45.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	16, 18	16.2	11.1	11.1
CS-4920	50.2	Spring-Assist	Yes	Auto/Adjustable**	Yes	16, 18, 20	16.2	11.2	11.1
CS-501P	50.2	Standard	No	Auto/Adjustable**	Yes	16 (+), 18, 20	16.6	9.5	10.6
CS-590	59.8	Standard	No	Auto/Adjustable**	Yes	18, 20, 24	21.8	10.2	13.2
CS-620P/PW	59.8	Standard	No	Auto/Adjustable**	Yes	16 (+), 18 (+ 620PW), 20, 24, 27	21.8	10.2	13.7/14.1
CS-680	66.8	Standard	No	Auto/Adjustable***	Yes	20, 24, 27	21.6	12.5	14.6
CS-7310P/PW	73.5	Standard	No	Auto/Adjustable***	Yes	20, 24, 28, 32	27.1	12.2	14.8/15.4

(+) Bar lengths available as accessories only *without bar and chain **clutch-driven ***with manual override



BARS AND CHAINS

BAR				CHAIN					
Chainsaw Models	Length in (cm)	Sprocket Nose	Bar Part #	Drive Link Count	Gauge (in.)	Pitch (in.)	Chain Part #	File Size (in.)	3-pack Chain
CS-2511P	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PXL45CQ	5/32	-
	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PXL52CQ	5/32	-
CS-2511T	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PXL45CQ	5/32	-
	12 (30)	Non-Replaceable	12A4CD3745C	45	.043	3/8 lp	90PX45CQ	11/64	-
	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PXL52CQ	5/32	-
	14 (35)	Non-Replaceable	14A4CD3752C	52	.043	3/8 lp	90PX52CQ	11/64	-
CS-271T	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
	12 (30)	Non-Replaceable	12A4CD3745C	45	.043	3/8 lp	90PX45CQ	11/64	-
CS-303T/310	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
CS-355T	12 (30)	Non-Replaceable	12A0ED3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
CS-355T/361P	14 (35)	Non-Replaceable	14A0ES3752C	52	.050	3/8 lp	91PXL52CQ	5/32	-
	16 (40)	Non-Replaceable	16A0ES3757C	57	.050	3/8 lp	91PXL57CQ	5/32	-
CS-3510	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
CS-352	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
CS-400	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
	18 (45)	Non-Replaceable	18A0CD3762C	62	.050	3/8 lp	91PX62CQ	5/32	91PX62CQ-3
CS-4010	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
	18 (45)	Non-Replaceable	18A0CD3762C	62	.050	3/8 lp	91PX62CQ	5/32	91PX62CQ-3
CS-4510	16 (40)	Non-Replaceable	16B0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
	18 (45)	Non-Replaceable	18B0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20B0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
CS-4910	16 (40)	Non-Replaceable	16F0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
	18 (45)	Non-Replaceable	18F0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20F0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
CS-4920	16 (40)	Non-Replaceable	16B0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
	18 (45)	Non-Replaceable	18B0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20B0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
CS-501P	16 (40)	Non-Replaceable	16F0LD3366C	66	.050	.325	20LPX66CQ	3/16	-
	18 (45)	Non-Replaceable	18F0LD3372C	72	.050	.325	20LPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20F0LD3378C	78	.050	.325	20LPX78CQ	3/16	-
CS-590	18 (45)	Non-Replaceable	18D0AS3864C	64	.050	3/8	72LPX64CQ	7/32	-
	20 (50)	Non-Replaceable	20D0AS3870C	70	.050	3/8	72LPX70CQ	7/32	72LPX70CQ-3
	24 (60)	Non-Replaceable	24D0AS3884C	84	.050	3/8	72LPX84CQ	7/32	-
	24 (60)	Replaceable	24D0PS3881C*	81	.050	3/8	72LPX81CQ	7/32	-
CS-620P/620PW/680	16 (40)	Replaceable	16D0PS3860C*	60	.050	3/8	72LPX60CQ	7/32	-
	18 (45)	Replaceable	18D0PS3866C*	66	.050	3/8	72LPX66CQ	7/32	-
	20 (50)	Replaceable	20D0PS3870C*	70	.050	3/8	72LPX70CQ	7/32	72LPX70CQ-3
	24 (60)	Replaceable	24D0PS3881C*	81	.050	3/8	72LPX81CQ	7/32	-
	27 (68)	Replaceable	27D0PS3893C*	93	.050	3/8	72LPX93CQ	7/32	-
CS-7310P/ CS-7310PW	20 (50)	Replaceable	20H0PS3872C*	72	.050	3/8	72LPX72CQ	7/32	-
	20 (50)	Replaceable	20H8PS3872C*	72	.058	3/8	73LPX72CQ	7/32	-
	24 (60)	Replaceable	24H0PS3884C*	84	.050	3/8	72LPX84CQ	7/32	-
	24 (60)	Replaceable	24H8PS3884C*	84	.058	3/8	73LPX84CQ	7/32	-
	28 (70)	Replaceable	28H0PS3893C*	93	.050	3/8	72LPX93CQ	7/32	-
	28 (70)	Replaceable	28H8PS3892C*	92	.058	3/8	73LPX92CQ	7/32	-
	32 (80)	Replaceable	32H0PS3805C*	105	.050	3/8	72LPX105CQ	7/32	-
	32 (80)	Replaceable	32H8PS3805C*	105	.058	3/8	73LPX105CQ	7/32	-
DCS-2500T	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PXL45CQ	5/32	-
DCS-5000	18 (45)	Non-Replaceable	18A0CD3762C	62	.050	3/8 lp	91PX62CQ	5/32	91PX62CQ-3

lp = Low Profile * Solid bars, all other bars are laminated.

The part numbers listed above (e.g. **91PXL52CQ**) include a two-or three-letter code that references the chain type. See detailed descriptions below.

CHAIN TYPE: LOW-KICKBACK CHAIN

- PX** Low-vibration chisel cutters with ramped depth gauges, bumper drive links and standard sequence.
- BPX** Low-vibration chisel cutters with bumper drive links and standard sequence.
- PXL** Low-vibration semi-chisel cutter with ramped depth gauges, bumper drive links and longer top plate.

CHAIN TYPE: PROFESSIONAL CHAIN

- LPX** Round-ground chisel cutters with bumper drive links and standard sequence.
- VXL** Low-vibration semi-chisel cutter with ramped depth gauges and longer top plate.

ECHO[®]

CHAINSAW ACCESSORIES

Chain Sharpening Files

Reference the chart on page 37 to find the correct size for your chain.



Part #	File Size (in.)	File Size (mm)	Description
99988801700	5/32	4.0	File, 2-Pack
99988801720	5/32	4.0	File (box of 12)
99988801701	11/64	4.5	File, 2-Pack
99988801721	11/64	4.5	File (box of 12)
99988801702	3/16	4.8	File, 2-Pack
99988801722	3/16	4.8	File (box of 12)
99988801703	13/64	5.2	File, 2-Pack
99988801723	13/64	5.2	File (box of 12)
99988801704	7/32	5.5	File, 2-Pack
99988801724	7/32	5.5	File (box of 12)
99988801760	6	152	Flat File (box of 12)
99988801761	Plastic File Handle, Blue, Pkg of 1		
99988801762	Plastic File Handle, Orange, Retail Pkg of 1		
99988801763	Plastic File Handle, Orange, Display Box of 20		

Chain Sharpening Kits

Kit includes (2) round files, (1) flat file, file guide, depth gauge, and plastic handle.



Part #	Size (in.)
99988800720	5/32
99988800721	11/64
99988800722	3/16
99988800723	13/64
99988800724	7/32

Bar & Chain Combos

Part #	Length (in.)	Model(s)
12A0CD91PX	12	CS-271T/303T/310/352
14A0CD91PX	14	CS-303T/310/3510/352
16A0CD91PX	16	CS-303T/310/3510/352/400/4010
18A0CD91PX	18	CS-400/4010, DCS-5000
20D0AS72LPX	20	CS-590



Bumper Spike (optional)

Part#: 99988802100 - CS-590 (right side mount)

Part#: C304000000 - CS-2511P (left side mount)



Chainsaw Kick Guard™

Part#: 2894902 - CS-2511P/T through CS-4010, as well as DCS-2500T & DCS-5000

Part#: 2893202 - CS-4510 through CS-7310P/PW



Fastension™

Allows for quick and easy chain adjustments without tools. For CS-400 only.

Part#: 99988802200



Felling Wedges

Part #	Length (in.)	Description	Qty.
99988801802	5.5	Smooth	24
99988801803	5.5	Spiked	24
99988801806	5.5	Smooth	1
99988801807	5.5	Spiked	1
99988801800	8	Smooth	12
99988801801	8	Spiked	12
99988801804	8	Smooth	1
99988801805	8	Spiked	1



Plastic Scabbard

Fits 12 to 20 in. bars.

Part#: 99988801595 - Retail Pkg. of 1

Part#: 89850308034 - Display Box of 12



Stump Vise

Part#: 99988801808



Palm Debris Guard (optional)

Part#: 91209 - CS-355T

Part#: A127000480 - CS-2511P/T



ToughChest™ Chainsaw Cases

Does not fit CS-620PW, CS-7310P/PW, DCS-5000.

Dimensions: 20 in. (L) x 12 in. (W) x 12.5 in. (H) without scabbard.

ToughChest™ - 20 in. Chainsaw Case

ECHO saws up to 20 in. bar.

Part#: 99988801210 - 37.75 in. length
with scabbard

ToughChest™ - 24 in. Chainsaw Case

ECHO saws up to 24 in. bar.

Does not fit CS-590 with 24 in. DOAS bar

Part#: 99988801211 - 41 in. length with scabbard



Arborist Pants*

Expandable 30 in. - 42 in. waist. Meets

OSHA standards for leg protection.

UL classified in accordance with
ASTM F1897-2014. Length 32 in.

Part#: 99988801304 (32 in. - 34 in. waist)

Part#: 99988801305 (36 in. - 38 in. waist)

Part#: 99988801306 (40 in. - 42 in. waist)

Part#: 99988801307 (44 in. - 46 in. waist)



20 in. Chainsaw Carry Bag

Dimensions: 18.5 in. (L) x 12 in. (W) x 11.5 (H).

Length with scabbard: 37 in.

Part#: 103942147



Chainsaw Safety Kit*

Includes chainsaw safety helmet
system, safety glasses, work gloves (L),
and professional apron style leg chaps.
Length 36 in.

Part#: 99988801527



Small Chainsaw Case

Fits most small to medium-sized saws

and ECHO saws up to CS-501P with

an 18 in. bar. Length with scabbard: 34 in.

Dimensions: 17.5 in. (L) x 12 in. (W) x 11.5 in. (H)

Part#: 99988801213



Chainsaw Gloves

Features two layers of Kevlar® on the back for
cut resistance, and foam pads on the palm for
vibration reduction. 100% goatskin leather.

Part#: 99988801600 (M)

Part#: 99988801601 (L)

Part#: 99988801602 (XL)

Part#: 99988801603 (XXL)



Chainsaw Chaps*

Expandable 30 in. - 42 in. waist. Meets

OSHA standards for leg protection.

UL classified in accordance with

ASTM F1897-2014.

Part#: 99988801300 - 36 in. long, Apron design

Part#: 99988801301 - 40 in. long, Apron design

Part#: 99988801302 - 36 in. long, Full-wrap design

Part#: 99988801303 - 40 in. long, Full-wrap design



Chainsaw Safety Helmet System

Noise reduction rating

22 dB(A) rated.

Part#: 99988801500

Replacement Parts:

Part#: 99988801501 - Harness

Part#: 99988801502 - Screen

Part#: 99988801503 - Visor Frame

Part#: 99988801504 - Ear Muffs



*ECHO recommends the use of personal protective equipment when operating ECHO power equipment.
Chainsaw chaps and pants may not provide the same level of protection with battery chainsaws as with gas chainsaws.